


# hpdSYSTEM moto

- ✓ HOT FOIL CODING SYSTEM WITH CASSETTE
- ✓ FOR SPECIAL APPLICATIONS

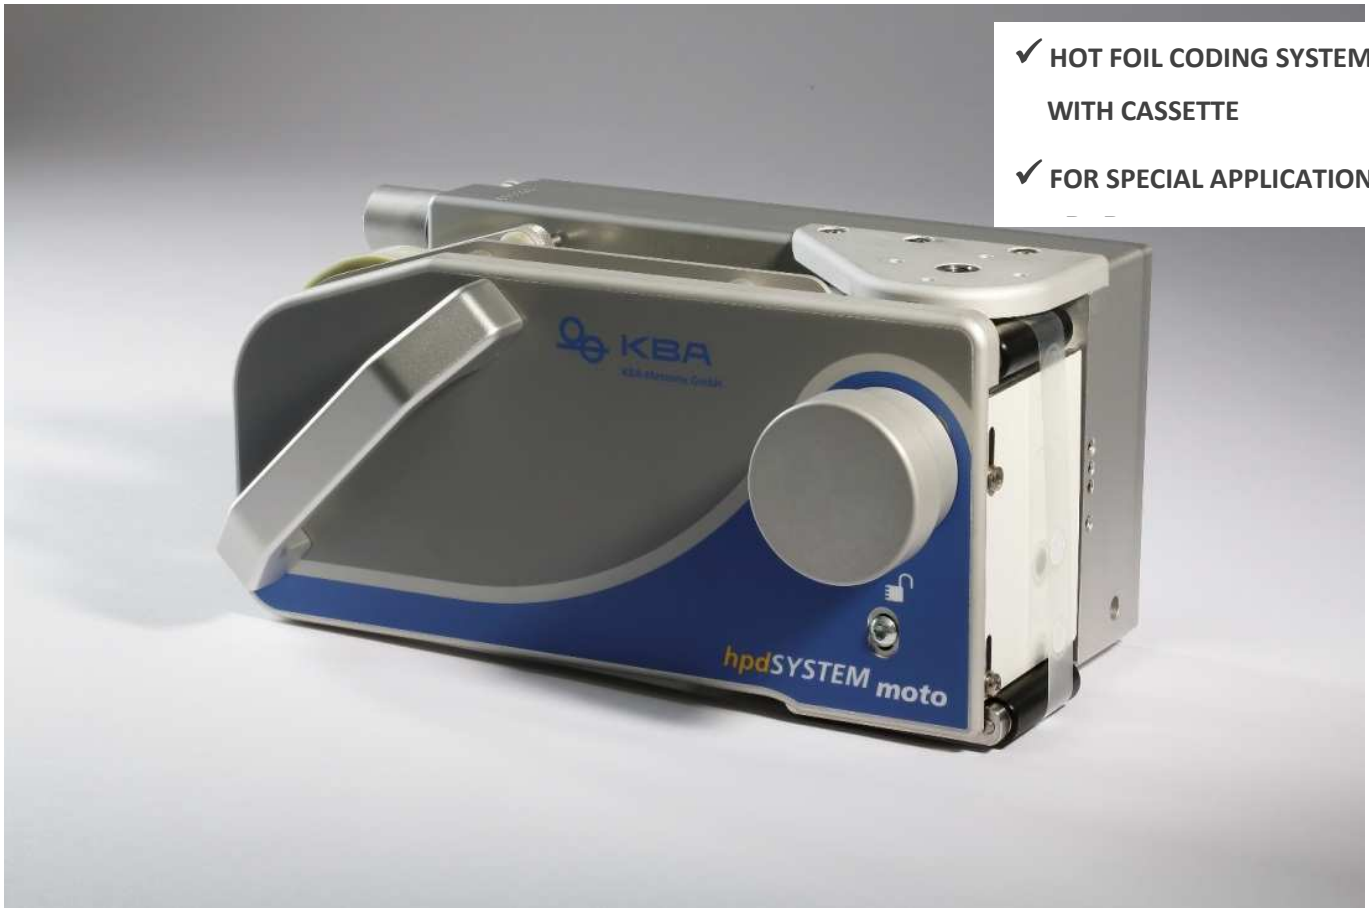

*Simple. Runs. Circular.*

INKJET Thermal Transfer Overprint

**HOTFOIL-CODING** **LASER** *Thermal-Inkjet* *Offline coding*

For use-by-dates **AFTER SALES** *BARCODE* *etc.*

**CODING SYSTEMS**

„MADE IN GERMANY“

### Print

- up to 20 x 20 mm printing format
- 60 prints / min.
- Print time:: 20 x 2000 ms
- Temperature: 50 – 220 ° C
- Printing pressure: 580 N at 6 bar

### Film

- Film diameter: 100 mm
- Automatic
- Displays film end
- Printer reset function



### Control unit

- 24 V / 10 A: with graphical display and keypad, interface RS 232, for second printer connection suitable, IP 54
- 110 - 240 V / 1 - 2 A: with graphical display and keypad, interface RS 232, IP 54
- Powerbox 110 - 240 V / 1 - 2 A

### Printing accessories

- PC-software hpdCONTROL
- Types
- Standard-mounting frame



Subject to technical and design changes.  
E&OE



### Type

- horizontal, optionally
  - right device variant
  - left device variant

### Technical data

Dimensions:	142 x 288 x 166 mm, H x W x T
Installation height:	142 mm
Drive type:	pneumatic drive
Air connection:	min. 4 – max. 6 bar, ø 6 mm
Compressed air consumption:	ca. 0,16 l per printing cycle
Power requirements:	24 V DC ± 10 %, 125 VA
Protection class:	Printer: IP 20
Temperature:	323 - 473 K (50° - 200° C) (infinitely variable)
Heating power:	120 W

